



IDEAL SEAL
— MANUFACTURING —

ISM 420 Rigid Frame Dock Shelter

Product Specifications



DESIGN HIGHLIGHTS

Raked translucent head frame protects dock from elements while allowing natural light to enter dock area

- Overlapping layers of fabric provide more wear resistance against the sharp corners of the trailer, extending the life of the shelter
- Flexible fiberglass stays ensure that head and side curtain pressure is maintained on the truck body while compressible neoprene cords conform to the vehicle's irregular perimeter
- High visibility guide stripes assist drivers with proper positioning of trailer
- Frame covered with translucent fiberglass allowing natural light to enter the dock area
- Steel supports protect frame from off-center trailers
- Choice of fabric and colors

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: Yes No Rear step section: Yes No

Tailgate/step section size: _____ in Yard jockeys: Yes No

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

MODEL _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____


COMPANY _____

ADDRESS _____

DATE _____

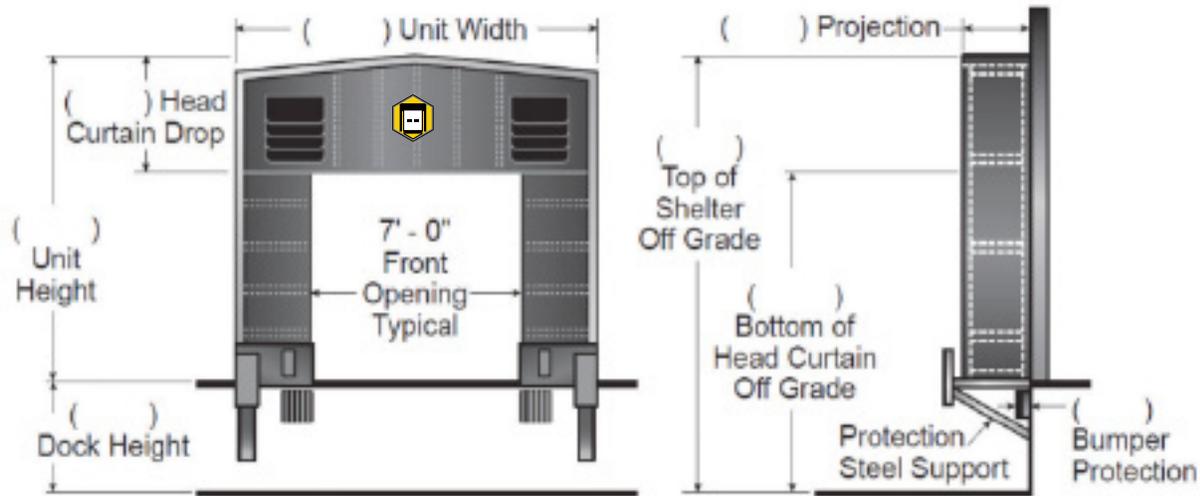

- Quantity _____ Complete unit Common member
- Drive Approach: Level Incline Decline _____% of grade
- Framing: Pressure treated wood 2"x 6" Wood frame
- Building Wall Structure: Metal Other
- Unit Width: 11'6" 12' 12'6" 13' _____"
- Unit Height: 11' 11'6" 12'6" 13'6" 14'6" 15'6"
- Head Member Style: Raked Flat
- Base Material: 22 oz. vinyl 40 oz. vinyl XL-100
- Color: Black Tan Brown Blue Green
- Head Curtain Drop: 30" 36" 42" 48" 54" 60" 66" 72"
- Tapered: Yes No
- Top Projection: 24" 30" 36" 42" 48" _____"
- Bottom Projection: 24" 30" 36" 42" 48" _____"
- Draft Pad: 24" 30" 36" 42" 48"
- Steel Supports: None 24" 30" 36" 42" 48" 54"
- Steel Support Extensions: None 6" 12" (Specify front channel or back extensions)
- Options: Door numbers Full length guide stripes Pull rope Assy

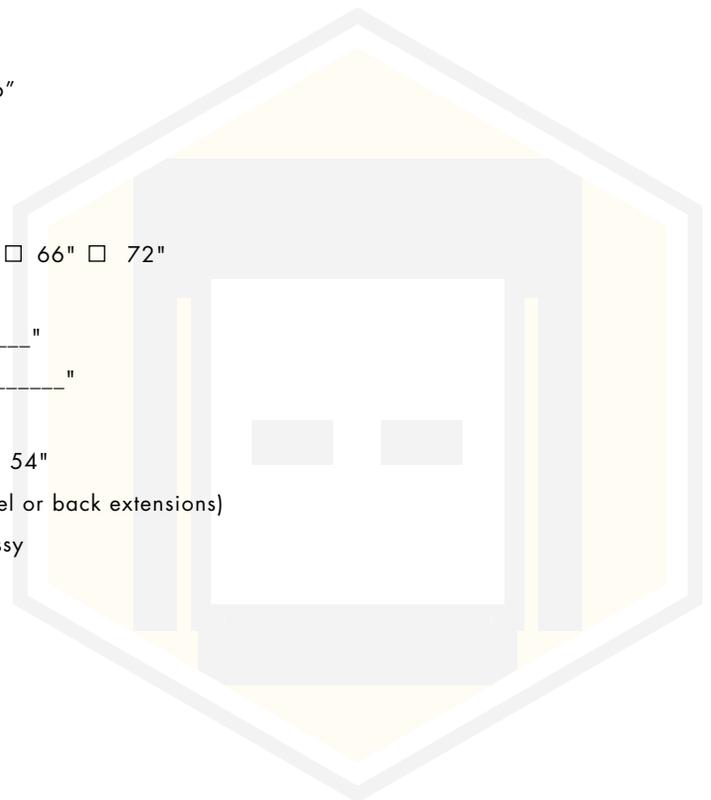

*Note: Consult factory for blackout application assistance.

*Conversions: To convert measurements to metric, see formulas below:
 Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)
 Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



IDEAL SEAL MANUFACTURING
 (956) 784-9145
 Engineering@idealsealmfg.com
 Edinburg, Texas