



IDEAL SEAL
— MANUFACTURING —

ISM 2200 Impactable Dock Shelter

Product Specifications



DESIGN HIGHLIGHTS

- Impactable foam-filled side members
- Fiberglass stays in side/head curtains
- Translucent head member transmits light
- Raked header for moisture run-off
- foam filled side pads offer impactable resistance with out destroying the shelter
- Full range of colors and fabrics

APPLICATION DATA

Door width: _____ ft. _____ in.
 Door height: _____ ft. _____ in.
 Dock height: _____ ft. _____ in.
 Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: Yes No Rear step section: Yes No

Tailgate/step section size: _____ in Yard jockeys: Yes No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

MODEL _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

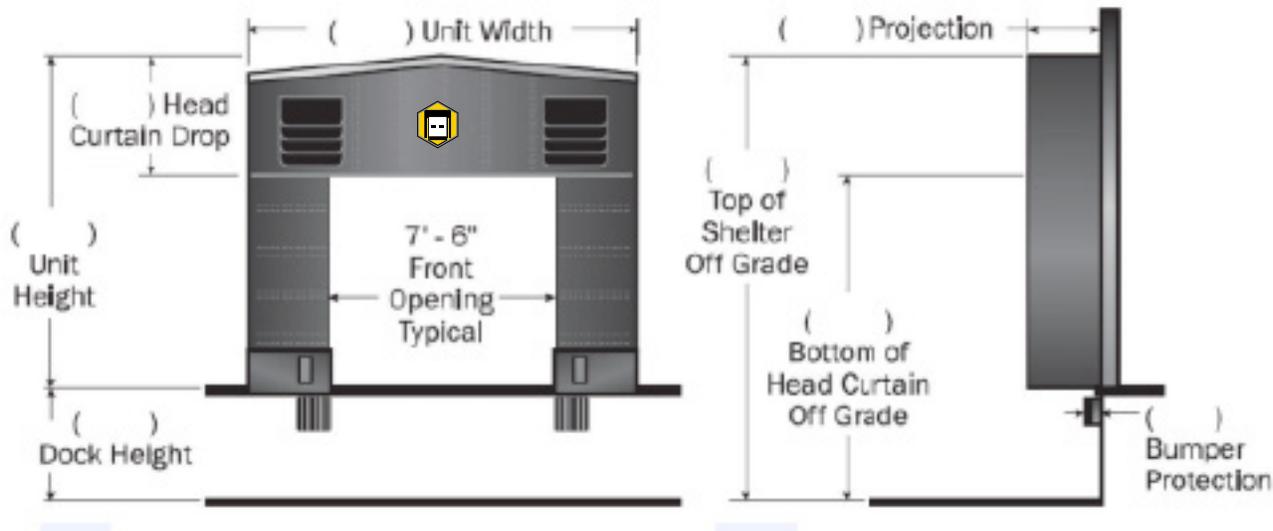

Quantity _____ Drive Approach: Level Incline Decline _____% of grade

Building Wall Structure: Metal Other

Unit Width: 11'6" 12' 12'6"

Unit Height: 11' 11'6" 12' 12'6"

Head Member Style: Raked Flat

Curtain Material: 22 oz. vinyl 40 oz. vinyl XL-100

Color: Black Tan Brown Blue Green


Head Curtain Drop: 30" 36" 42" 48" 54" _____"

Tapered: Yes No

Top Projection: 18" 20" 22" 24" 26" 28" 30" 36" 42" _____"

Bottom Projection: 18" 20" 22" 24" 26" 28" 30" 36" 42"

Options: Door numbers Full length guide stripes Pull rope Assy

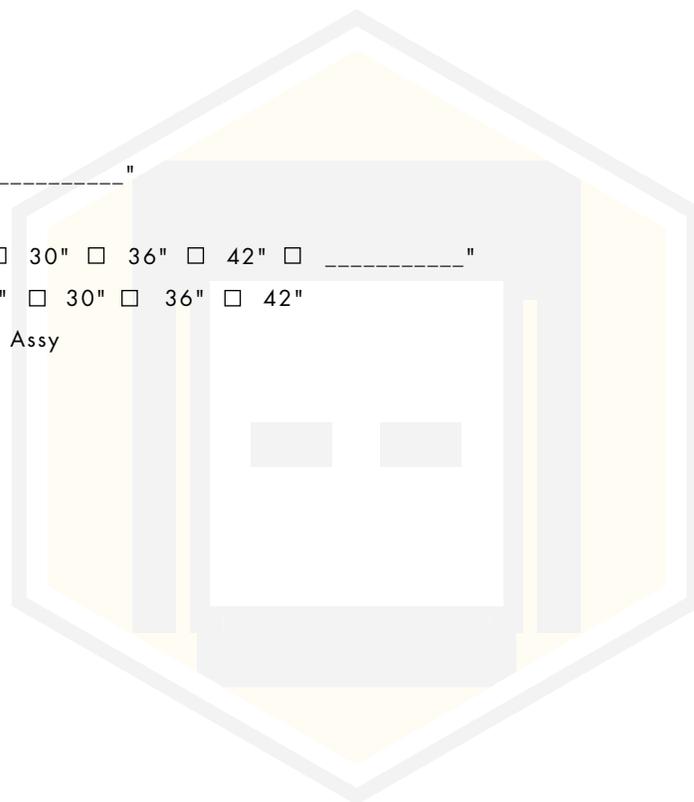

*Note: Consult factory for blackout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



IDEAL SEAL MANUFACTURING
 (956) 784-9145
 Engineering@idealsealmfg.com
 Edinburg, Texas